

LED FLOOD LIGHTS

MODULAR FL Series


High Power LED Flood Lights is a perfect replacement to the conventional CDMT / Halogen & Sodium Vapour / Mercury Lights. These Lights are designed to consume less power, higher output, no periodic maintenance and weather + waterproof. These lightings are widely used on Roads, Buildings, Commercial Building, Convention Centres, surroundings & all other lighting areas.



Product Images



Dimensions

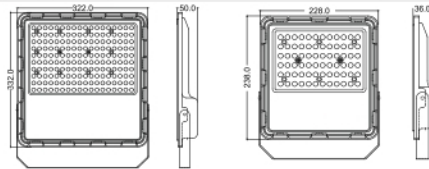

TECHNICAL PARAMETERS

Model	MODULAR FLOOD LIGHTS				
Product Code	SFL-XM-01	SFL-XM-02	SFL-XM-03	SFL-XM-04	SFL-XM-05
Power Wattage	30W	50W	100W	150W	200W
Length (mm)	197	238	292	332	360
Width (mm)	187	228	282	322	350
Height (mm)	36	36	48	50	50
LED Color Temperature	3000k 4000k 6000k				
Beam Angle	60°				
Optical Cover	Polycarbonate LENS				
Light Source	CREE OSRAM BridgeLUX				
Housing Material	Aluminium Pressure Die-Casting				
Power Requirement	AC 120 ~ 300V , 50 ~ 60Hz				
Protection Rating	IP 66				
Lumen / W	110lm / W				
CRI	≥ 70 Ra ≥ 80 Ra				
Operating Temperature	-10°C - +50°C				
Driver	Integrated Driver				
Power Factor & THD	> 0.9 < 10%				
Nett Weight (gms)	900 g	1300 g	2000 g	2600 g	3200 g