


HIGHBAY LIGHTING

SQUARE Highbay Series


As their name implies, high-bay lights are used to illuminate spaces with high ceilings. Highbay Lights have multiple applications across a range of industries, including workshops, factories and assembly lines. One of the benefits of high-bay lighting is that it provides clear, uniform lighting without Glare. Highbay Lights are Water + Weather proof and can be operated in any kind of working conditions.



Product Images

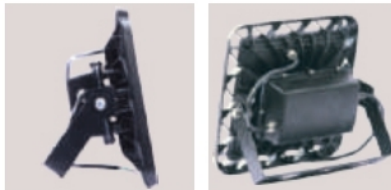

Dimensions

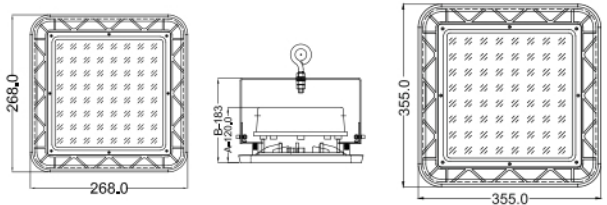

TECHNICAL PARAMETERS

Model	SQUARE Highbay LIGHT		
Product Code	SQ-22	SQ-20	SQ-21
Power Wattage	70W ~ 100W	120W	150W ~ 200W
Front Dia (mm)	268 x 268	268 x 268	355 x 355
Height (mm)	112	120	124
LED Color Temperature	3000k 4000k 6000k		
Optical Cover	Toughened Glass		
Light Source	OSRAM BRIDGELUX CREE		
Housing Material	Aluminium Pressure Die-Cast		
Power Requirement	AC 120 ~ 300V , 50 ~ 60Hz		
Protection Rating	IP 66		
Lumen / W	100lm / W ~ 130lm / W		
CRI	≥ 70 Ra ≥ 80 Ra		
Operating Temperature	-10°C - +50°C		
Driver	Integrated Driver		
Power Factor & THD	> 0.9 < 10%		
Nett Weight (gms)	2900 g	3200 g	4500 g