


LED TUBE LIGHT

Tube Series


A Perfect Replacement for the traditional Tube Light, with a very close difference in appearance but with higher Performance. Aluminium Extrusion Housing for Heat dissipation, with clear/ frosted glass diffuser. It has numerous high power SMD LED's giving a uniform lighting output. Energy saving up to 85% compared to standard halogen & incandescent lamps. Our LED's have less than 3% – 5%* light decay in 15000hrs testing.



Product Images

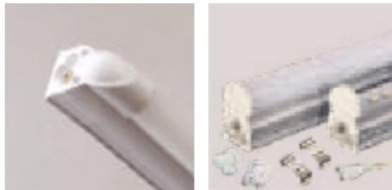

Dimensions



Optional Feature



App Control

TECHNICAL PARAMETERS

Model	TUBE LIGHT	
Power Wattage	10W	20W
Length (mm)	600	1200
Width (mm)	25	25
Height (mm)	30	30
LED Color Temperature	3000k 4500k 6500k	
Beam Angle	120°	
Optical Cover	Polycarbonate	
Light Source	BridgeLUX Everlite Osram Cree	
Housing Material	Aluminium Extrusion	
Power Requirement	AC 120 ~ 300V, 50 ~ 60Hz	
AC Input	Centre Wire	
Protection Rating	IP 20	
Lumen / W	100lm / W	
CRI	≥ 80 Ra	
Operating Temperature	0°C - 50°C	
Driver	In-Built Driver	
Power Factor & THD	> 0.9 < 15%	