

HIGHBAY LIGHTING

UFO HIGHBAY - II Series


As their name implies, high-bay lights are used to illuminate spaces with high ceilings. Highbay Lights have multiple applications across a range of industries, including workshops, factories and assembly lines. One of the benefits of high-bay lighting is that it provides clear, uniform lighting without Glare. Highbay Lights are Water + Weather proof and can be operated in any kind of working conditions.



Product Images



Dimensions

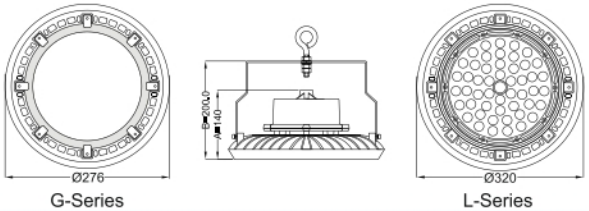

TECHNICAL PARAMETERS

Model	UFO HIGHBAY - II				
Product Code	G-11	G-13	G-12	L-14	L-15
Power Wattage	70W ~ 120W	150W ~ 200W	100W	150W	200W
Front Dia (mm)	276	320	276	320	360
Height (mm)	135	140	135	140	140
Optical Cover	Toughened Glass			Polycarbonate Modular LENS	
LED Color Temperature	3000k 4000k 6000k				
Light Source	OSRAM BRIDGELUX CREE				
Housing Material	Aluminium Pressure Die-Cast				
Power Requirement	AC 120 ~ 300V, 50 ~ 60Hz				
Protection Rating	IP 66				
Lumen / W	100lm / W ~ 130lm / W			150lm / W	
CRI	≥ 70 Ra ≥ 80 Ra				
Operating Temperature	-10°C - +50°C				
Driver	Integrated Driver				
Power Factor & THD	> 0.9 < 10%				
Nett Weight (gms)	3300 g	5100 g	3000 g	4700 g	5000 g