

HIGHBAY LIGHTING

UFO Highbay Series


As their name implies, high-bay lights are used to illuminate spaces with high ceilings. Highbay Lights have multiple applications across a range of industries, including workshops, factories and assembly lines. One of the benefits of high-bay lighting is that it provides clear, uniform lighting without Glare. Highbay Lights are Water + Weather proof and can be operated in any kind of working conditions.



Product Images



Dimensions

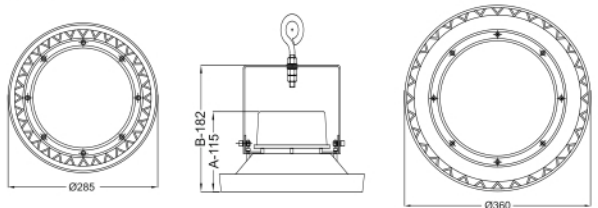

TECHNICAL PARAMETERS

Model	UFO Highbay LIGHT			
Product Code	C-01	C-09	C-02	C-03
Power Wattage	70W ~ 100W	120W	150W ~ 200W	250W ~ 300W
Front Dia (mm)	285	285	360	452
Height (mm)	115	135	140	143
LED Color Temperature	3000k 4000k 6000k			
Optical Cover	Toughened Glass			
Light Source	OSRAM BRIDGELUX CREE			
Housing Material	Aluminium Pressure Die-Cast			
Power Requirement	AC 120 ~ 300V, 50 ~ 60Hz			
Protection Rating	IP 66			
Lumen / W	100lm / W ~ 130lm / W			
CRI	≥ 70 Ra ≥ 80 Ra			
Operating Temperature	-10°C - +50°C			
Driver	Integrated Driver			
Power Factor & THD	> 0.9 < 10%			
Nett Weight (gms)	2900 g	3200 g	4600 g	5600 g